
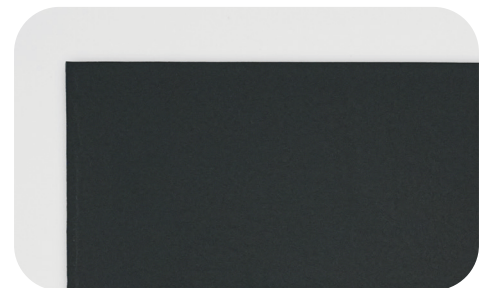
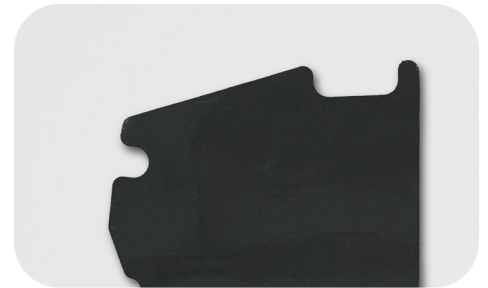


KL 95

KERATHERM® thermally conductive adhesive film

Benefits

- High thermal conductivity
- High adhesive strength
- Good adhesion to various surfaces
- low thickness

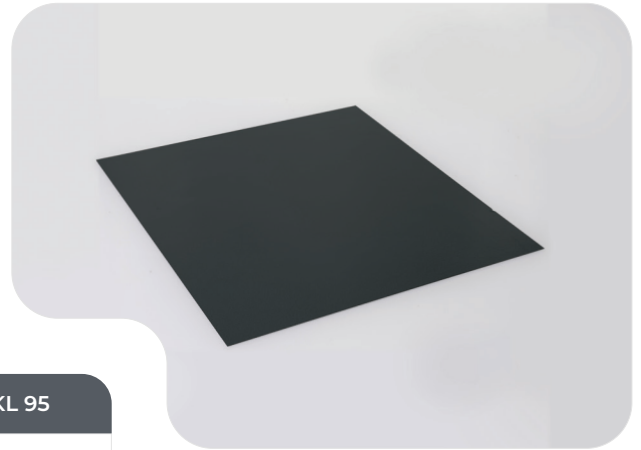

Properties	Unit	KL 95
Colour		grey
Basic material		Filled Acrylic Polymer
Thermal Properties*		
Thermal conductivity λ^{**}	W/mK	1.3
Thermal resistance R_{th}	K/W	0.32
Electrical Properties*		
Dielectric breakdown voltage $U_{d,AC}$	kV/mm	2.0
Volume resistivity	Ωm	2.0×10^{11}
Dielectric loss factor $\tan \delta$		2.4×10^{-1}
Dielectric constant ϵ_r		1.7
Mechanical Properties		
Hardness	Shore A	60
Tensile shear strength*	N/cm ²	> 6.5
Tensile shear strength* (Temperature aging)	1h/65°C 24h/65°C 72h/65°C	N/cm ² 26.90 34.30 48.80
Physical Properties		
Adhesion*** (bonding strength)	Nmm	> 0.5
Tack*** (surface Adhesiveness)	mm	> 1.0
Density	g/cm ³	2.24
Application temperature***	°C	-40 to +100
Flame rating	UL-94	V-0
Possible thickness	mm	0.18 - 0.3

* Measured @ thickness 0.18 mm

** Tensile shear strength Alu/Foil/Alu – 25x25 mm²(outsourcing – 48h/RT);

*** used measurement – Texture Analyser (TA.XT-plus)