


# 86 / 225 & 86 / 228

## Silicone Gap Pad



### Benefits

- Good price performance ratio
- Very soft to compensate mechanical impacts like vibrations
- Elastic behavior
- Also available as a double layer material

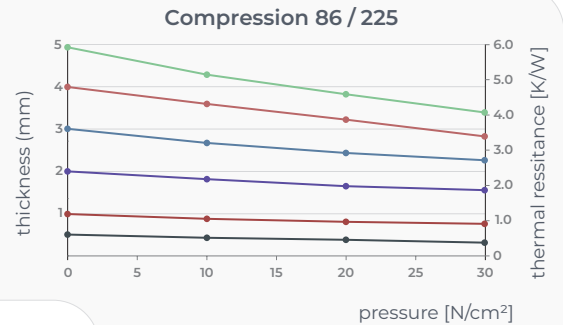

Properties	Unit	86 / 225	86 / 228
Colour		orange	pink / orange
Assembly		single layer, fibre glass reinforcement up to 4.0 mm	double layer carrier film 86/52 in 0.125 mm
<b>Thermal Properties*</b>			
Thermal resistance $R_{th}$	K/W	1.2	1.2
Thermal impedance $R_{ti}$	$^{\circ}\text{Cmm}^2/\text{W}$	240	240
	$\text{Kin}^2/\text{W}$	0.37	0.37
Thermal conductivity $\lambda$	W/mK	2.0	2.0
<b>Electrical Properties**</b>			
Dielectric breakdown voltage $U_{d,AC}$	kV	6.0	6.0
Volume resistivity	$\Omega\text{m}$	$2.2 \times 10^{11}$	$2.8 \times 10^{11}$
Dielectric loss factor $\tan \delta$		$1.0 \times 10^{-3}$	$1.0 \times 10^{-3}$
Dielectric constant $\epsilon_r$		3.6	2.5
<b>Mechanical Properties</b>			
Hardness	Shore 00	30 - 45	30 - 45
Young's modulus	$\text{N/cm}^2$	58	160
<b>Physical Properties</b>			
Application temperature	$^{\circ}\text{C}$	-40 to +180	-40 to +180
Density	$\text{g/cm}^3$	1.65	1.95
Total mass loss (TML)	Ma.-%	< 0.44	< 0.44
Flame rating	UL-94	V-0	
Possible thickness	mm	0.5 - 5.0	0.5 - 5.0

\* Measured @ thickness 1 mm \*\* Measured @ thickness 0.5 mm

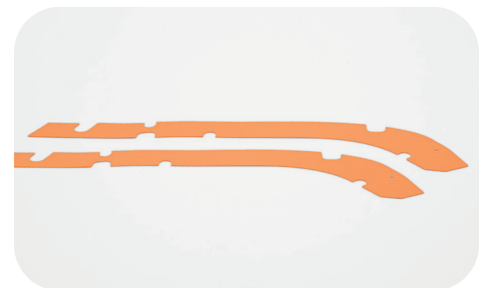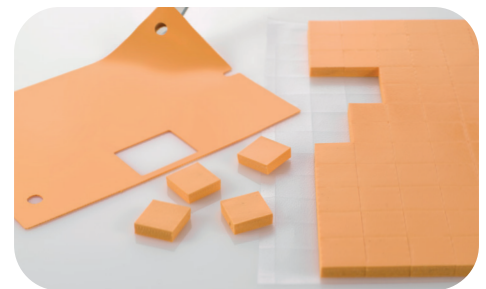

! At maximum pressure, Gap Pads (SOFTTHERM® Films) should not be compressed beyond 30% of the original thickness. In case the material should be compressed more than 30%, the SOFTTHERM® material may leak out.



#### Note

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. KERAFO<sup>®</sup> is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. All specifications are subject to change without notice. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded. In case KERAFO<sup>®</sup> would be nevertheless held liable, on whatever legal ground, KERAFO<sup>®</sup>'s liability will in no event exceed the amount of the concerned delivery. All KERAFO<sup>®</sup> products are sold pursuant to the KERAFO<sup>®</sup>'s Terms and Conditions of sale and delivery in effect from time to time, a copy of which will be furnished upon request.

05-2024