


# 86 / 25 KERATHERM®

## PRELIMINARY DATA SHEET



### Benefits

- high thermal conductivity
- high electrical isolation
- easy handling
- optional available with adhesive coating

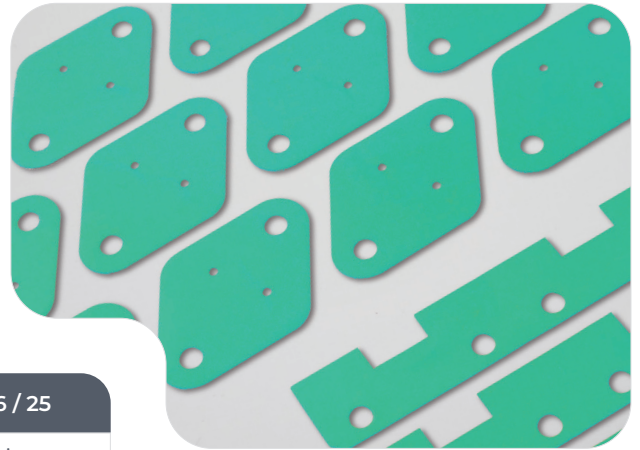

Properties	Unit	86 / 25
Colour		mint
<b>Thermal Properties*</b>		
Thermal resistance $R_{th}$	K/W	0.225
Thermal conductivity $\lambda$	W/mK	2.5
<b>Electrical Properties*</b>		
Dielectric breakdown voltage $U_{d,AC}$	kV	3.5
Volume resistivity	$\Omega m$	$1,5 \times 10^{11}$
Dielectric loss factor $\tan\delta$		$8 \times 10^{-3}$
Dielectric constant $\epsilon_r$		1,9
<b>Mechanical Properties</b>		
Hardness	Shore A	60 - 75
Tensile strength	N/mm <sup>2</sup>	tbd
Elongation	%	tbd
<b>Physical Properties</b>		
Application temperature	°C	-60 to +200
Density	g/cm <sup>3</sup>	2.37
Possible thickness	mm	0.225

\* Measured @ thickness 0.225 mm

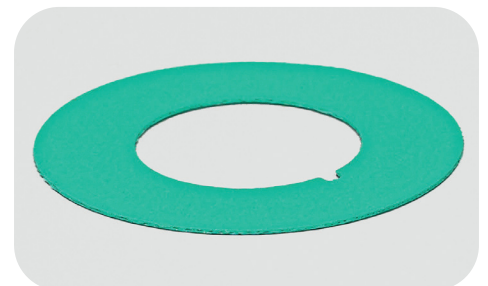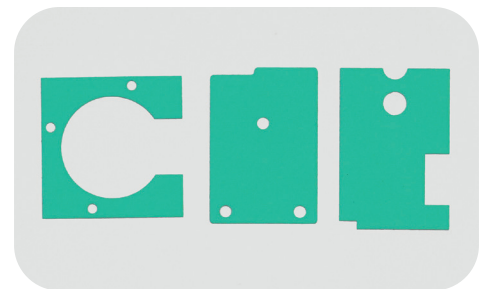

✓ Optional available with  
onside adhesive coating **86/25 K**



### Note

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. KERAFOL® is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. All specifications are subject to change without notice. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded. In case KERAFOL® would be nevertheless held liable, on whatever legal ground, KERAFOL®'s liability will in no event exceed the amount of the concerned delivery. All KERAFOL® products are sold pursuant to the KERAFOL®'s Terms and Conditions of sale and delivery in effect from time to time, a copy of which will be furnished upon request.

05-2024